

KLSV Series

Dual & Triple Solenoid Valve



Features

2/2 direct-acting solenoid valve. Selections of dual inlets or triple inlets with one outlet port. Used for switching outputs between multiple inlet fluids. Non-return valves are installed in every inlet ports.

Body material

Aluminum

Port

G1/2"

Orifice

10mm

Voltage

DC 24

Seal material

Viton

Working Pressure


0~35 Bar

Media

Inert gas or Oxygen

Overall Dimension

KLSV-2/1-10-24-AL Two inlets one outlet ports

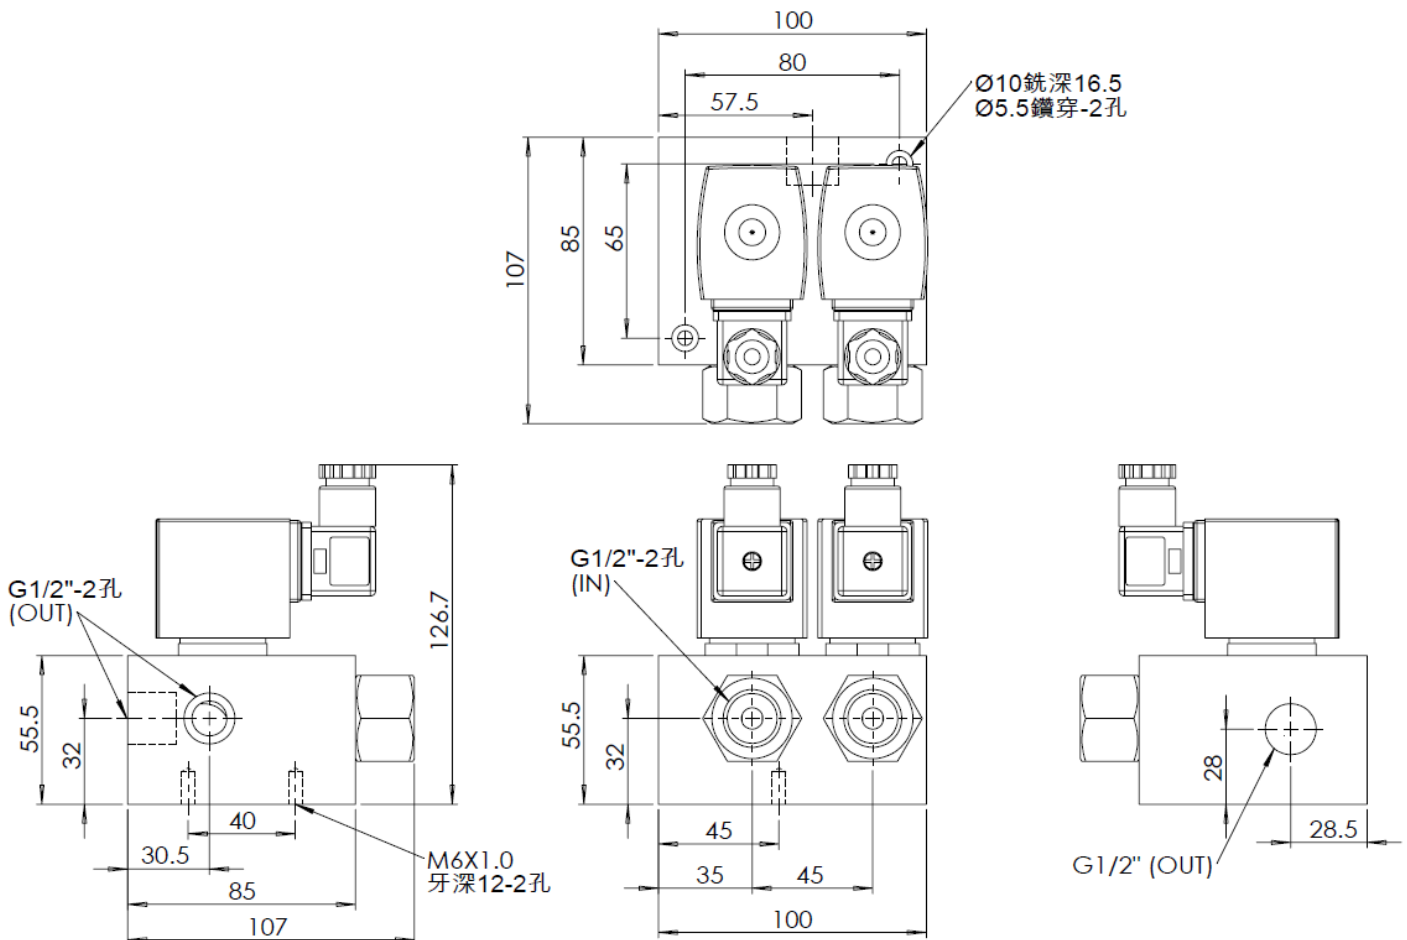

KLSV Series

Dual & Triple Solenoid Valve



Overall Dimension

KLSV-3/1-10-24-AL Three inlets one outlet ports

